# **Current Transducer HY50-P**


For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Primary nomina r.m.s. current I <sub>PN</sub> (A)	al Primary current measuring range I <sub>P</sub> (A)	Primary conductor (mm)	Туре	
50	±150	1.6 x 3.5	HY 50-P	
<b>v</b> <sub>c</sub>	Supply voltage (± 5 %)		± 15	V
I <sub>c</sub>	Current consumption		± 10	тA
Î <sub>P</sub>	Overload capability (1 ms)		5	50 x I <sub>PN</sub>
V <sub>d</sub>	R.m.s. voltage for AC isolation test, 50/60Hz, 1 mn		2.5	k٧
V <sub>b</sub>	R.m.s. rated voltage, safe separation		500 <sup>1)</sup>	V
R <sub>is</sub>	Isolation resistance @ 500 VDC		> 1000	MΩ
V <sub>OUT</sub>	Output voltage @ $\pm \mathbf{I}_{PN}$ , $\mathbf{R}_{I} = 10 \text{ k}\Omega$ , $\mathbf{T}_{A} = 25^{\circ}\text{C}$		±4	V
R <sub>OUT</sub>	Output internal resistance		100	Ω
R	Load resistance		>1	kΩ

racy - Dynamic performance data			
Accuracy @ $\mathbf{I}_{PN}$ , $\mathbf{T}_{A} = 25^{\circ}C$ (without offset)		<±1	%
Linearity <sup>2)</sup> $(0 \pm I_{PN})$		<±1 '	% of I <sub>PN</sub>
Electrical offset voltage, $\mathbf{T}_{A} = 25^{\circ}$ C		< ± 40	m̈́Ϋ
Hysteresis offset voltage $@ I_p = 0;$			
after an excursion of 1 x $I_{PN}$		< ± 15	mV
Thermal drift of $V_{OF}$	typ.	± 1.5	mV/K
Ŭ.L.	max.	± 3	mV/K
Thermal drift of the gain (% of reading)		< ± 0.1	%/K
Response time @ 90% of $I_{_{ m P}}$		< 3	μs
di/dt accurately followed		> 50	A∕µs
Frequency bandwidth <sup>3)</sup> (- 3 dB)		DC 50	kHz
ral data			
Ambient operating temperature		- 10 + 8	30 °C
Ambient storage temperature		- 25 + 8	35 °C
Mass		< 14	g
Standards <sup>4)</sup>		EN 5017	'8
	Linearity <sup>2)</sup> $(0 \pm I_{PN})$ Electrical offset voltage, $T_A = 25^{\circ}C$ Hysteresis offset voltage @ $I_P = 0$ ; after an excursion of 1 x $I_{PN}$ Thermal drift of $V_{OE}$ Thermal drift of the gain (% of reading) Response time @ 90% of $I_P$ di/dt accurately followed Frequency bandwidth <sup>3)</sup> (- 3 dB) <b>tral data</b> Ambient operating temperature Ambient storage temperature Mass	Accuracy @ $\mathbf{I}_{PN}$ , $\mathbf{T}_{A} = 25^{\circ}C$ (without offset)Linearity 2) (0 $\pm \mathbf{I}_{PN}$ )Electrical offset voltage, $\mathbf{T}_{A} = 25^{\circ}C$ Hysteresis offset voltage @ $\mathbf{I}_{P} = 0$ ;after an excursion of 1 x $\mathbf{I}_{PN}$ Thermal drift of $\mathbf{V}_{OE}$ typ.Thermal drift of the gain (% of reading)Response time @ 90% of $\mathbf{I}_{P}$ di/dt accurately followedFrequency bandwidth 3) (- 3 dB)	Accuracy (a) $I_{PN}$ , $T_A = 25^{\circ}C$ (without offset)< ± 1Linearity 2)(0± $I_{PN}$ )< ± 1Electrical offset voltage, $T_A = 25^{\circ}C$ < ± 40Hysteresis offset voltage (a) $I_P = 0$ ;after an excursion of 1 x $I_{PN}$ < ± 15Thermal drift of $V_{CE}$ typ.thread drift of the gain (% of reading)< ± 0.1Response time (a)90% of $I_P$ < 3di/dt accurately followed> 50Frequency bandwidth 3)(- 3 dB)DC 50total dataAmbient operating temperature- 10 + 8Ambient storage temperature- 25 + 8Mass< 14

 $I_{PN} = 50 A$ 



#### Features

- Hall effect measuring principle
- Galvanic isolation between primary and secondary circuit
- Isolation voltage 2500 V~
- Compact design for PCB mounting
- Low power consumption
- Extended measuring range (3 x I<sub>PN</sub>)
- Insulated plastic case recognized according to UL 94-V0.

### Advantages

- Easy mounting
- Small size and space savings
- Only one design for wide current ratings range
- High immunity against external interference

## Applications

- General purpose inverters
- Switched-Mode Power Supplies (SMPS)
- AC motor speed control
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications.


001010/3

Notes : <sup>1)</sup> Pollution class 2, overvoltage category III

- <sup>2)</sup> Linearity data exclude the electrical offset.
  - <sup>3)</sup> Please refer to derating curves in the technical file to avoid excessive core heating at high frequency

<sup>4)</sup> Please consult characterisation report for more technical details and application advice.



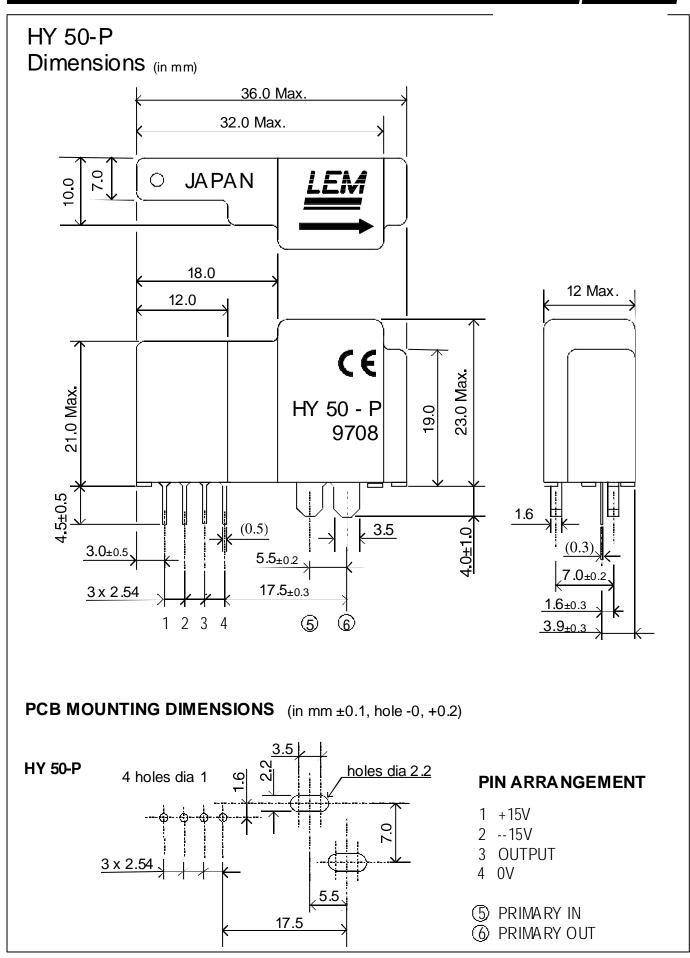

LEM reserves the right to change limits and dimensions.